



# LYNGDORF LCR-2

SEAMLESS MULTICHANNEL PERFORMANCE FROM A STYLISH ON-WALL SPEAKER

## SEAMLESS MULTICHANNEL PERFORMANCE

Designed to bring music and movie soundtracks to life, the LCR-2 completes the FR-2 speakers for a seamless multichannel performance. Perfect as a stylish center speaker, below a TV, or for surround channels, it blends effortlessly into a living space while delivering powerful and clear sound. It is available in the same modern color combinations as the FR-2. With its space-saving, exceptionally shallow cabinet specifically tuned for wall placement and powerful woofers and tweeters, the LCR-2 extends the outstanding sound performance of the FR-2 for multimedia rooms.

## BEST SOUND PERFORMANCE FROM POWERFUL DRIVE-UNITS


The high-performance drive-units are integrated in a shallow speaker design that takes advantage from the room acoustics instead of working against it. The LCR-2 has been specifically tuned for wall placement, with the woofers located as close as possible to the wall behind the speaker. The LCR-2 has the same midrange-woofers as the FR-2 floor standing speakers and therefore allows a seamless integration. Combined with Lyngdorf BW woofers, the LCR-2 is basis for outstanding multichannel systems.

## SATIN MATT COLOR COMBINATIONS AND EXCHANGEABLE FABRIC COVERS

The LCR-2 is tuned for the best on-wall sound performance and also shaped for placing it on-wall in modern living rooms or media rooms. The speaker is exceptionally shallow, with smooth rounded edges and the front baffle merging into the top, modern satin-matt color options and individual combinations, and optional exchangeable fabric covers from Danish specialist Gabriel. The LCR-2 is made at Lyngdorf Audio in Denmark.

## HIGHLIGHTS

- Ideal center speaker addition for the FR-2
- Can be used on its own for any multichannel speaker setup
- High-performance woofers and tweeter
- Modern satin-matt colors and exchangeable fabric covers

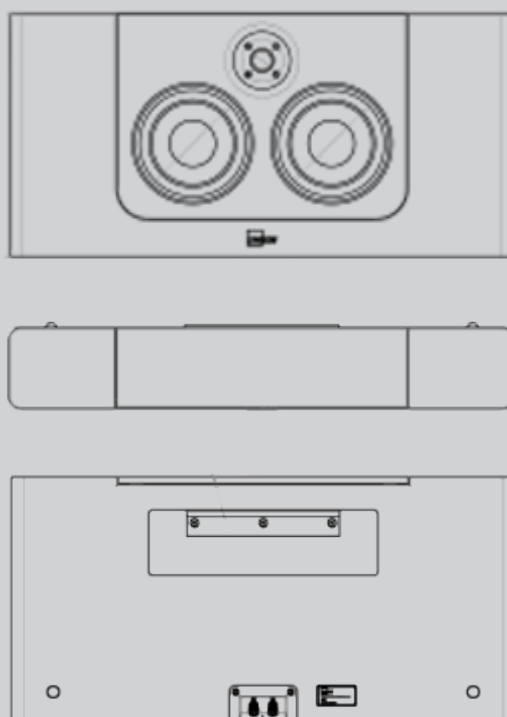

## SPECIFICATIONS

<b>Description:</b>	2-way on-wall speaker
<b>Power handling:</b>	250 W (IEC)
<b>Tweeter:</b>	1 x 28mm / 1,1" Fabric soft dome
<b>Midrange/woofer:</b>	2 x Size: 2 x 180 mm / 6,5", aluminum cone, 35 mm voice coil, vented magnet, vented die-cast aluminum basket
<b>Frequency response:</b>	80 – 20.000 Hz (-3dB)
<b>Enclosure:</b>	MDF construction, closed cabinet, internally braced
<b>Nominal impedance:</b>	4 Ohm (min. 3,7 Ohm)
<b>Maximum SPL:</b>	117 dB (1m, peak)
<b>Sensitivity:</b>	92 dB (2.83V/1m)
<b>Crossover point:</b>	1.7 kHz
<b>Connections:</b>	Binding posts, gold plated
<b>Placement:</b>	On-wall with supplied wall-mount bracket
<b>Dimensions (W x H x D):</b>	66,5 x 32 x 11 cm 26 x 12.6 x 4.33 inches
<b>Weight:</b>	10,8 kg / 23.8 lb
<b>Finishes (enclosure/front baffle):</b>	White/white, black/black, mocca/mocca, white/black, white/mocca, black/mocca
<b>Optional fabric covers:</b>	Midnight grey, light grey